


## LA-LT-035 Dielectric Fiber Optic Cable Series

Gel-Free, Single Jacket Non Armored, Flexible Loose Buffer Tubes, Easy Installation

### Product Features

- Ideal for duct and lashed aerial installations as well as general OSP installations
- Gel-free design and light weight
- Optical fiber counts up to 576
- Available with GR-20 certified single-mode and multi-mode optical fibers
- Designed and engineered in the US

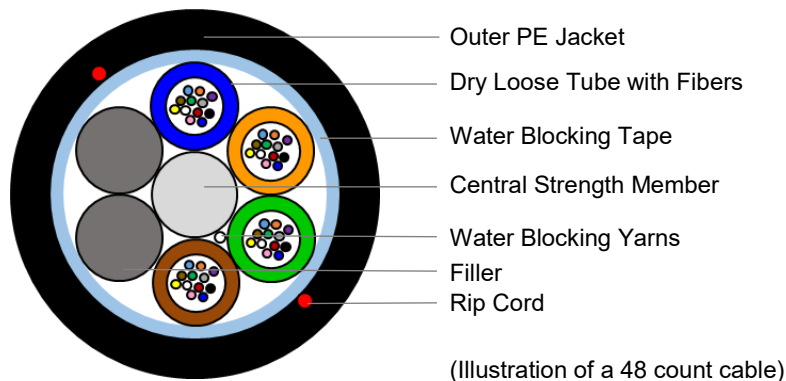

### Product Description

Lexington Ames' LT-035 Dielectric Single Jacket Loose Buffer Tube Cable is designed to meet the requirements specific to the North American standards for every day OSP installations and provides the optical and mechanical performances perfectly equivalent to the cables that are being wide installed in North America. The cable is 100% gel-free and flexible for easy installation and routing.

The cable core consists of optical fibers, dry water swellable material, and PP loose buffer tubes, and poly ethylene fillers (if necessary), SZ-stranded around the dielectric central strength member with water blocking yarns. The cable structure is reinforced by the application of a water blocking core wrapping tape covered by rip cords and an flexible outer MDPE jacket.

The construction of the cable guarantees flexibility and complete water blocking to ensure easy installation and long-term reliability.

Specifications							
Fiber Count	12-72	96	144	192-216	288	432	576
Cable OD - in. (mm)	0.378 (9.6)	0.437 (11.1)	0.551 (14.0)	0.575 (14.6)	0.661 (16.8)	0.768 (19.5)	0.886 (22.5)
Weight - lb/kft (kg/km)	40 (59)	54 (80)	87 (129)	80 (119)	111 (165)	134 (200)	181 (270)
Number of Fibers per Tube	12	12	12	12	12	24	24
Number of Tube Positions	6	8	12	18 (6+12)	24 (9+15)	18 (6+12)	24 (9+15)
Tube Diameter, mm	2.3	2.3	2.3	2.3	2.3	2.5	2.5
Jacket Thickness, mm	1.1	1.1	1.1	1.1	1.1	1.3	1.3
Mechanical Properties							
Minimum Bending Radius, Loaded	20 x OD		Maximum Rated Cable Load			607 lbf (2700 N)	
Minimum Bending Radius, Unloaded	10 x OD		Maximum Long Term Load			202 lbf (900 N)	
Operation Temperature Range	-40°C ~ +70°C		Maximum Crush Resistance			247 lbf (1100 N)	
Optical Fiber							
Fiber type	Wavelengths (nm)	Max. Attenuation (~288F)	Max. Attenuation (432F~)	MFD@1310nm	Coated Diameter		
G.652.D (D0)	1310/1550	0.35/0.25 dB/km	0.4/0.3 dB/km	9.2 ± 0.4 μm	250 ± 15 μm		
G.657.A1 (A1)	1310/1550	0.35/0.25 dB/km	0.4/0.3 dB/km	8.9 ± 0.4 μm	250 ± 15 μm		

### Part Number: LA-LT-035-L1-L2-L3-L4

L1 = Total fiber count (000) L2 = Fiber count per tube (12 or 24) L3 = Fiber type (D0, A1, M1, M2, M3, M4) L4 = PM (PP tube and MDPE Jacket)

## LA-LT-035 Dielectric Fiber Optic Cable Series

### Packing and Shipping Information

- Reel Lengths: 13,123FT or 19,686FT for 12-72F, 13,123FT for 96-288F

#### Reel Information

Fiber Count	Packing Dimension (in.)		Reel Dimension (in.)				
	Height	Width	Reel Diameter	Barrel Diameter	Outer Width	Inner Width	Arbor Hole D.
12-72 (19,686')	63.0	22.2	61.0	27.6	22.2	17.5	4.33
12-72 (13,123')	55.1	22.2	53.1	27.6	22.2	17.5	4.33
96	61.0	22.2	59.1	27.6	22.2	17.5	4.33
144	65.7	29.5	63.0	31.5	29.5	24.8	4.33
192-216	67.7	29.5	65.0	31.5	29.5	24.8	4.33
288	66.5	41.3	63.0	31.5	41.3	35.4	4.33

#### Shipping Information

Fiber Count	Reel Length		Weight, lbs (kg)			20FT Container		40FT Container	
	FT	KM	Net Weight	Reel Weight	Gross Weight	Reel Count	Total Length	Reel Count	Total Length
12-72	19686	6	780 (354)	476 (216)	1257 (570)	13	255,918FT	29	570,894FT
12-72	13123	4	520 (236)	386 (175)	906 (411)	16	209,968FT	33	433,059FT
96	13123	4	705 (320)	452 (205)	1157 (525)	14	183,722FT	29	380,567FT
144	13123	4	1138 (516)	611 (277)	1748 (793)	10	131,230FT	21	275,583FT
192-216	13123	4	1049 (476)	639 (290)	1689 (766)	9	118,107FT	20	262,460FT
288	13123	4	1455 (660)	882 (400)	2337 (1060)	6	78,738FT	14	183,722FT

